



"innovation in its most functional form"

PRODUCT DATA SHEET

SWi20/25TI INTEGRATED HYDRAULIC FLANGE SPREADER

SPREADING FORCE: 20T (200kN) 1st step 25T (240kN) 4th step SPREADING DISTANCE: 6.0 - 103.5mm (0.24 - 4.0") WEIGHT: 8.5kg (18.8lb)

CAPABILITIES

At 10,000psi (700bar): 20T spread force (1st step) 24T spread force (4th step)

6.0mm – 87.5mm (0.24" - 3.4") spread over 4 steps (without stepped blocks)



using only 1st step

TOOL DIMENSIONS - CLOSED



USER FEATURES

- Practical, portable and lightweight
- Moulded plastic handle for comfort
- Revolving handle to aid horizontal or vertical spreading
- Offset handle is directly over the centre of mass
- Removable handle for improved access
- Revolving lanyard connection point
- Spread indicator markings for clear precise visual progress feedback

SAFETY FEATURES

- No finger pinch-points
- Increased step depth on upper steps
- Safety lanyard 1.0m (39") length
- · Forged key components for strength and reliability
- Fail-safe design designated cylinder nose seal failure

MAINTENANCE FEATURES

- Rapid disassembly and assembly
- Quick jaw replacement remove 1 fastener
- Quick tip replacement remove 2 fasteners
- Narrow jaw teeth improved tool wear

info@equalizerinternational.com www.equalizerinternational.com


SWi20/25TI


INTEGRATED HYDRAULIC FLANGE SPREADER




"innovation in its most functional form"


JAW DIMENSIONS (WITHOUT STEPPED BLOCKS ATTACHED)

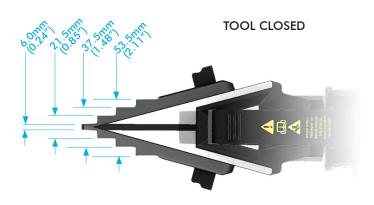

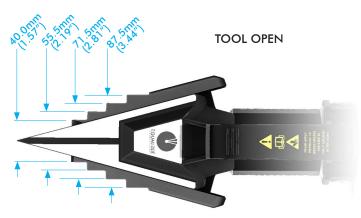

JAW DIMENSIONS (WITH STEPPED BLOCKS ATTACHED)

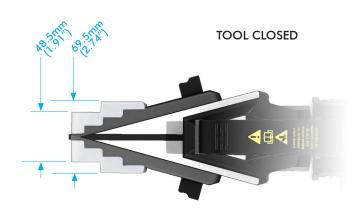

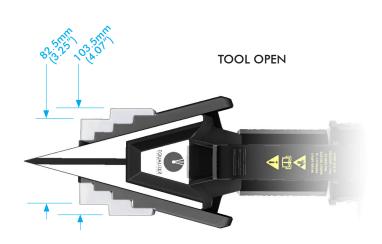

STANDARD KIT

- 1 x SWi2025TI Flange Spreader Wedgehead
- 1 x 10,000psi (700bar) Integral Hydraulic Pump/Cylinder
- 1 x Set of Safety Blocks
- 1 x Pair of Stepped Blocks
- 1 x Lanyard
- 1 x Hex Key
- 1 x Carry-Strap
- 1 x Instruction Manual
- 1 x Carry Case

580mm x 330mm x 165mm (22.8" x 13.0" x 6.5") Gross Kit Weight 13.8kg (30.3lb) Product Code: SWi2025TISTDSPB

